

On Model Based Synthesis of Embedded Control Software

Vadim Alimguzhin, Federico Mari, Igor Melatti, Ivano Salvo, Enrico Tronci

Department of Computer Science

Sapienza University of Rome

via Salaria 113, 00198 Rome

email: {alimguzhin,mari,melatti,salvo,tronci}@di.uniroma1.it

Vadim Alimguzhin is also with the Department of Computer Science and Robotics

Ufa State Aviation Technical University

12 Karl Marx Street, Ufa, 450000, Russian Federation

Thursday 19th July, 2012

Abstract

Many *Embedded Systems* are indeed *Software Based Control Systems* (SBCSs), that is control systems whose controller consists of control software running on a microcontroller device. This motivates investigation on *Formal Model Based Design* approaches for control software. Given the formal model of a plant as a *Discrete Time Linear Hybrid System* and the implementation specifications (that is, number of bits in the *Analog-to-Digital* (AD) conversion) correct-by-construction control software can be automatically generated from System Level Formal Specifications of the closed loop system (that is, *safety* and *liveness* requirements), by computing a suitable finite abstraction of the plant.

With respect to given implementation specifications, the automatically generated code implements a time optimal control strategy (in terms of set-up time), has a *Worst Case Execution Time* linear in the number of AD bits b , but unfortunately, its size grows exponentially with respect to b . In many embedded systems, there are severe restrictions on the computational resources

(such as memory or computational power) available to microcontroller devices.

This paper addresses model based synthesis of control software by trading system level non-functional requirements (such as optimal set-up time, ripple) with software non-functional requirements (its footprint). Our experimental results show the effectiveness of our approach: for the inverted pendulum benchmark, by using a quantization schema with 12 bits, the size of the small controller is less than 6% of the size of the time optimal one.

Categories and Subject Descriptors

D.2.2[**Software**]: Design Tools and Techniques – *Computer Aided Software Engineering*; D.2.4[**Software**]: Software/Program Verification – *Model Checking, Formal Methods*

General Terms

Embedded Systems, Hybrid Systems

Keywords

Design and implementation of embedded software, Model- and component-based software design and analysis

1 Introduction

Many *Embedded Systems* are indeed *Software Based Control Systems* (SBCSs). An SBCS consists of two main subsystems: the *controller* and the *plant*. Typically, the plant is a physical system consisting, for example, of mechanical or electrical devices whereas the controller consists of *control software* running on a microcontroller. In an endless loop, the controller reads *sensor* outputs from the plant and sends commands to plant *actuators* in order to guarantee that the *closed loop system* (that is, the system consisting of both plant and controller) meets given *safety* and *liveness* specifications (*System Level Formal Specifications*).

Software generation from models and formal specifications forms the core of *Model Based Design* of embedded software [16]. This approach is particularly interesting for SBCSs since in such a case system level (formal) specifications are much easier to define than the control software behavior itself.

The typical control loop skeleton for an SBCS is the following. Measure x of the system state from plant *sensors* go through an *analog-to-digital* (AD) conversion, yielding a *quantized* value $\hat{x}$. A function *ctrlRegion* checks if $\hat{x}$ belongs to the region in which the control software works correctly. If this is not the case a *Fault Detection, Isolation and Recovery* (FDIR) procedure is triggered, otherwise a function *ctrlLaw* computes a command $\hat{u}$ to be sent to plant *actuators* after a *digital-to-analog* (DA) conversion. Basically, the control software design problem for SBCSs consists in designing software implementing functions *ctrlLaw* and *ctrlRegion*.

For SBCSs, system level specifications are typically given with respect to the desired behavior of the closed loop system. The *control software* (that is, *ctrlLaw* and *ctrlRegion*) is designed using a *separation-of-concerns* approach. That is, *Control Engineering* techniques (e.g., see [8]) are used to design, from the closed loop system level specifications, *functional specifications (control law)* for the *control software* whereas *Software Engineering* techniques are used to design control software implementing the given functional specifications. Such a separation-of-concerns approach has several drawbacks.

First, usually control engineering techniques do not yield a formally verified specification for the control law when quantization is taken into account. This is particularly the case when the plant has to be modelled as a *Hybrid System*, that is a system with continuous as well as discrete state changes [1, 14, 4]. As a result, even if the control software meets its functional specifications there is no formal guarantee that system level specifications are met since quantization effects are not formally accounted for.

Second, issues concerning computational resources, such as control software *Worst Case Execution Time* (WCET), can only be considered very late in the SBCS design activity, namely once the software has been designed. As a result, the control software may have a WCET greater than the sampling time. This invalidates the schedulability analysis (typically carried out before the control software is completed) and may trigger redesign of the software or even of its functional specifications (in order to simplify its design).

Last, but not least, the classical separation-of-concerns approach does not effectively support design space exploration for the control software. In fact, although in general there will be many functional specifications for the control software that will allow meeting the given system level specifications, the software engineer only gets one to play with. This overconstrains a priori the design space for the control software implementation preventing, for example, effective performance trading (e.g., between number of bits in AD conversion, WCET, RAM usage, CPU power consumption, etc.). We note that the above considerations also apply to the typical situation where Control Engineering techniques are used to design a control law and then tools like Simulink are used to generate the control software.

1.1 Motivations

The previous considerations motivate research on Software Engineering methods and tools focusing on control software synthesis (rather than on control law synthesis as in Control Engineering). The objective is that from the plant model (as a hybrid system), from formal specifications for the closed loop system behavior and from *Implementation Specifications* (that is, number of bits used in the quantization process) such methods and tools can generate correct-by-construction control software satisfying the given specifications.

The tool QKS [21] automatically synthesises control software starting from a plant model given as a *Discrete Time Linear Hybrid System* (DTLHS), the number of bits for AD conversion, and System Level Formal Specifications of the closed loop system. Besides meeting functional specifications, the generated control software meets some non functional requirements: it implements a (near) time-optimal control strategy, and it has a WCET guaranteed to be linear in the number of bits of the quantization schema.

The generated code, however, may be very large, since it grows exponentially with the number of bits of the quantization schema [22]. On the other hand, controllers synthesised by considering a finer quantization schema usually have

a better behaviour with respect to many other non-functional requirements, such as *ripple* and *set-up time*. Typically, a microcontroller device in an Embedded System has limited resources in terms of computational power and/or memory. Current state-of-the-art microcontrollers has up to 512Kb of memory, and other design constraints (mainly costs) may impose to use even less powerful devices. As we will see in Section 4, by considering a quantization schema with 12 bits on the inverted pendulum system, *QKS* generates a controller which has a size greater than 8Mbytes.

This paper addresses model based synthesis of control software by trading system level non-functional requirements with software non-functional requirements. Namely, we aim at reducing the code footprint, possibly at the cost of having a suboptimal set-up time and ripple.

1.2 Our Main Contributions

Fig. 1 shows the model based control software synthesis flow that we consider in this paper. A specification consists of a plant model, given as a DTLHS, System Level Formal Specifications that describe functional requirements of the closed loop system, and Implementation Specifications that describe non functional requirements of the control software, such as the number of bits used in the quantization process, the required WCET, etc.

A DTLHS is a discrete time hybrid system whose dynamics is modeled as a *linear predicate* over a set of continuous as well as discrete variables that describe system state, system inputs and disturbances. System level safety as well as liveness specifications are modeled as sets of states defined, in turn, as predicates. In our setting, as always in control problems, liveness constraints define the set of states that any evolution of the closed loop system should eventually reach (*goal states*).

The control synthesis problem is undecidable for DTLHSs, as it can be shown by adapting the proofs in [15] for the reachability problem in dense time Hybrid Systems. Despite that, non complete or semi-algorithms usually succeed in finding controllers for meaningful hybrid systems.

Fig. 1 summarizes the main steps that the tools *QKS* takes in order to generate the control software starting from specifications. First (step 1), a suitable finite discrete abstraction (*control abstraction* [21]) $\hat{\mathcal{H}}$ of the DTLHS plant model $\mathcal{H}$ is computed; $\hat{\mathcal{H}}$ depends on the quantization schema and it is the plant as it can be seen from the control software after AD conversion. Then (step 2), given an abstraction $\hat{G}$ of the goal states G , it is computed a controller $\hat{K}$ that starting from

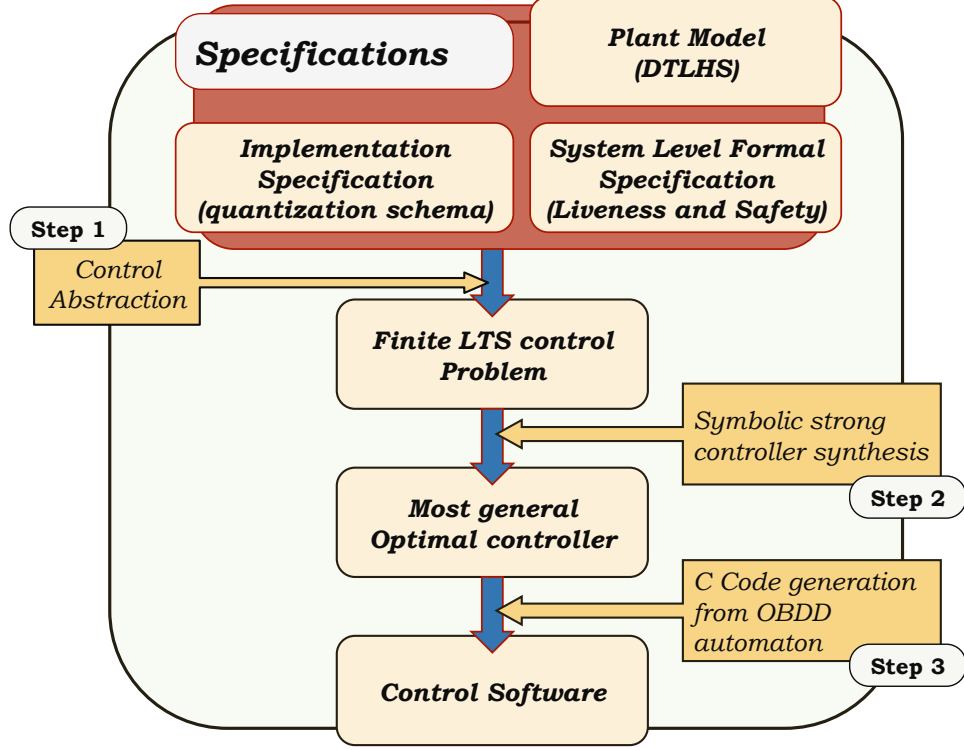


Figure 1: Control Software Synthesis Flow.

any initial abstract state, drives $\hat{\mathcal{H}}$ to $\hat{G}$ regardless of possible nondeterminism. Control abstraction properties ensure that $\hat{K}$ is indeed a (quantized representation of a) controller for the original plant $\mathcal{H}$. Finally (step 3), the finite automaton $\hat{K}$ is translated into control software (C code).

To find the quantized controller $\hat{K}$, QKS implements the symbolic (i.e. OBDD based) synthesis algorithm in [9]. Such algorithm finds a time-optimal solution, i.e. the controller $\hat{K}$ drives the system $\hat{\mathcal{H}}$ to $\hat{G}$ always along shortest paths. The finer control abstractions are (i.e. when the quantization schema is more precise), the better is the control strategy found. Unfortunately, such time optimal control strategies may lead to very large controllers in terms of the size of the generated C control software.

Driven by the intuition that smaller controllers enable the same action in larger regions of the set of abstract state space, we design a controller synthesis algorithm (Alg. 2 in Section 3.1) that gives up optimality and looks for maximal regions that can be controlled by performing the same action. We formally prove its correct-

ness (Theorem 1) and completeness (Theorem 2) in Section 3.2.

Experimental results in Section 4 show that such heuristic greatly mitigates the exponential growth of the controller size without having a significant impact on non-functional system level requirements such as set-up time and ripple. We accomplish this result without changing the WCET of the control software.

For the inverted pendulum benchmark, by using a quantization schema with 12 bits, the size of our controller is less than 6% of the size of the time optimal controller.

1.3 Related Work

Control Engineering has been studying control law design (e.g., optimal control, robust control, etc.), for more than half a century (e.g., see [8]). Also *Quantized Feedback Control* has been widely studied in control engineering (e.g. see [13]). However such research does not address Hybrid Systems (our case) and, as explained above, focuses on control law design rather than on control software synthesis (our goal). Furthermore, all control engineering approaches model *quantization errors* as statistical *noise*. As a result, correctness of the control law holds in a probabilistic sense. Here instead, we model quantization errors as non-deterministic (*malicious*) *disturbances*. This guarantees system level correctness of the generated control software (not just that of the control law) with respect to *any* possible sequence of quantization errors.

When the plant model is a *Linear Hybrid Automaton* (LHA) [1] reachability and existence of a control law are both undecidable problems [15]. This, of course, has not prevented devising effective (semi) algorithms for such problems. Examples are in [14, 12, 29, 27],

Quantization can be seen as a sort of abstraction, which has been widely studied in a hybrid system formal verification context (e.g., see [2, 3]). Note however that in a verification context abstractions are designed so as to ease the verification task whereas in control software synthesis quantization is a design requirement since it models a hardware component (AD converter) which is part of the specification of the control software synthesis problem. Indeed, in our setting, we have to design a controller *notwithstanding* the nondeterminism stemming from the quantization process. As a result, the techniques used to devise clever abstractions in a verification setting cannot be directly used in our synthesis setting where quantization is given.

Abstraction based approach to controller synthesis has been also broadly investigated. Based on a notion of suitable finite state abstraction (e.g. see [24])

control software synthesis for continuous time linear systems (no switching) has been implemented in the tool PESSOA [23]. On the same wavelength, [30] generates a control strategy from a finite abstraction of a *Piecewise Affine Discrete Time Hybrid System* (PWA-DTHS). Also the Hybrid Toolbox [6] considers PWA-DTHSs. Such tools output a feedback control law that is then passed to Matlab in order to generate control software. Finite horizon control of PWA-DTHSs has been studied using a MILP based approach. See, for example, [7]. Explicit finite horizon control synthesis algorithms for discrete time (possibly non-linear) hybrid systems have been studied in [11] and citations thereof. We note that all such approaches do not account for state feedback quantization since they all assume *exact* (i.e. real valued) state measures. Thus, as explained above, they do not offer any formal guarantee about system level correctness of the generated software, which is instead our focus here.

Optimal switching logic, i.e. synthesis of optimal controllers with respect to some cost function have been also widely investigated. For example, see [17] and citations thereof. In this paper, we focus on non-functional software requirements rather than non-functional system-level requirements.

Correct-by-construction software synthesis in a finite state setting has been studied, for example, in [5, 28, 9]. Such approaches cannot be directly used in our context since they cannot handle continuous state variables.

Summing up, to the best of our knowledge, no previously published result is available about model based synthesis of small footprint control software from a plant model, system level specifications and implementation specifications.

2 DTLHS Control Software Synthesis

To make this paper self-contained, in this section we briefly summarize previous work on automatic generation of control software for *Discrete Time Linear Hybrid System* (DTLHS) from System Level Formal Specifications focusing on basic definitions and mathematical tools that will be useful in the sequel.

Fig. 1 shows the control software synthesis flow that we consider here. We model the controlled system (i.e. the plant) as a DTLHS (Section 2.3), that is a discrete time hybrid system whose dynamics is modeled as a *linear predicate* (Section 2.1) over a set of continuous as well as discrete variables. The semantics of a DTLHS is given in terms of a *Labeled Transition Systems* (LTS, Section 2.2).

Given a plant $\mathcal{H}$ modeled as a DTLHS, a set of *goal states* G (*liveness specifications*) and an *initial region* I , both represented as linear predicates, we are interested in finding a *restriction* K of the behaviour of $\mathcal{H}$ such that in the *closed loop system* all paths starting in a state in I lead to G after a finite number of steps. Finding K is the DTLHS *control problem* (Section 2.3.1) that is in turn defined as a suitable LTS control problem (Section 2.2.1).

Finally, we are interested in controllers that take their decisions by looking at *quantized states*, i.e. the values that the control software reads after an AD conversion. This is the *quantized control problem* (Section 2.4).

2.1 Predicates

We denote with $[n]$ an initial segment $\{1, \dots, n\}$ of the natural numbers. We denote with $X = [x_1, \dots, x_n]$ a finite sequence of variables. By abuse of language we may regard sequences as sets and we use $\cup$ to denote list concatenation. Each variable x ranges on a known (bounded or unbounded) interval $\mathcal{D}_x$ either of the reals or of the integers (discrete variables). We denote with $\mathcal{D}_X$ the set $\prod_{x \in X} \mathcal{D}_x$. To clarify that a variable x is *continuous* (i.e. real valued) we may write x^r . Similarly, to clarify that a variable x is *discrete* (i.e. integer valued) we may write x^d . Boolean variables are discrete variables ranging on the set $\mathbb{B} = \{0, 1\}$. We may write x^b to denote a boolean variable. Analogously X^r (X^d , X^b) denotes the sequence of real (integer, boolean) variables in X . Unless otherwise stated, we suppose $\mathcal{D}_{X^r} = \mathbb{R}^{|X^r|}$ and $\mathcal{D}_{X^d} = \mathbb{Z}^{|X^d|}$. Finally, if x is a boolean variable we write $\bar{x}$ for $(1 - x)$.

A *linear expression* over a list of variables X is a linear combination of variables in X with rational coefficients. A *linear constraint* over X (or simply a *constraint*) is an expression of the form $L(X) \leq b$, where $L(X)$ is a linear expression over X and b is a rational constant. In the following, we also write $L(X) \geq b$ for $-L(X) \leq -b$.

Predicates are inductively defined as follows. A constraint $C(X)$ over a list of variables X is a predicate over X . If $A(X)$ and $B(X)$ are predicates over X , then $(A(X) \wedge B(X))$ and $(A(X) \vee B(X))$ are predicates over X . Parentheses may be omitted, assuming usual associativity and precedence rules of logical operators. A *conjunctive predicate* is a conjunction of constraints. For conjunctive predicates we will also write: $L(X) = b$ for $((L(X) \leq b) \wedge (L(X) \geq b))$ and $a \leq x \leq b$ for $x \geq a \wedge x \leq b$, where $x \in X$.

A *valuation* over a list of variables X is a function v that maps each variable $x \in X$ to a value $v(x) \in \mathcal{D}_x$. Given a valuation v , we denote with $X^* \in \mathcal{D}_X$ the

sequence of values $[v(x_1), \dots, v(x_n)]$. By abuse of language, we call valuation also the sequence of values X^* . A *satisfying assignment* to a predicate P over X is a valuation X^* such that $P(X^*)$ holds. If a satisfying assignment to a predicate P over X exists, we say that P is *feasible*. Abusing notation, we may denote with P the set of satisfying assignments to the predicate $P(X)$. Two predicates P and Q over X are *equivalent*, denoted by $P \equiv Q$, if they have the same set of satisfying assignments. Two predicates $P(X)$ and $Q(Z)$ are *equisatisfiable*, notation $P \simeq Q$ if P is satisfiable if and only if Q is satisfiable.

A variable $x \in X$ is said to be *bounded* in P if there exist $a, b \in \mathcal{D}_x$ such that $P(X)$ implies $a \leq x \leq b$. A predicate P is bounded if all its variables are bounded.

Given a constraint $C(X)$ and a fresh boolean variable (*guard*) $y \notin X$, the *guarded constraint* $y \rightarrow C(X)$ (if y then $C(X)$) denotes the predicate $((y = 0) \vee C(X))$. Similarly, we use $\bar{y} \rightarrow C(X)$ (if not y then $C(X)$) to denote the predicate $((y = 1) \vee C(X))$. A *guarded predicate* is a conjunction of either constraints or guarded constraints. It is possible to show that, if a guarded predicate P is bounded, then P can be transformed into an equisatisfiable conjunctive predicate.

2.2 Labeled Transition Systems

A *Labeled Transition System* (LTS) is a tuple $\mathcal{S} = (S, A, T)$ where S is a (possibly infinite) set of states, A is a (possibly infinite) set of actions, and $T : S \times A \times S \rightarrow \mathbb{B}$ is the *transition relation* of $\mathcal{S}$. We say that T (and $\mathcal{S}$) is *deterministic* if $T(s, a, s') \wedge T(s, a, s'')$ implies $s' = s''$, and *nondeterministic* otherwise. Let $s \in S$ and $a \in A$. We denote with $\text{Adm}(\mathcal{S}, s)$ the set of actions admissible in s , that is $\text{Adm}(\mathcal{S}, s) = \{a \in A \mid \exists s' : T(s, a, s')\}$ and with $\text{Img}(\mathcal{S}, s, a)$ the set of next states from s via a , that is $\text{Img}(\mathcal{S}, s, a) = \{s' \in S \mid T(s, a, s')\}$. A *run* or *path* for an LTS $\mathcal{S}$ is a sequence $\pi = s_0, a_0, s_1, a_1, s_2, a_2, \dots$ of states s_t and actions a_t such that $\forall t \geq 0 \ T(s_t, a_t, s_{t+1})$. The length $|\pi|$ of a finite run π is the number of actions in π . We denote with $\pi^{(S)}(t)$ the $(t + 1)$ -th state element of π , and with $\pi^{(A)}(t)$ the $(t + 1)$ -th action element of π . That is $\pi^{(S)}(t) = s_t$, and $\pi^{(A)}(t) = a_t$.

2.2.1 LTS Control Problem

A *controller* for an LTS $\mathcal{S}$ is used to restrict the dynamics of $\mathcal{S}$ so that all states in the initial region will reach the goal region. In the following, we formalize such a concept by defining solutions to an LTS control problem. In what follows, let




Figure 2: The LTS $\mathcal{S}$ in Example 1.

$\mathcal{S} = (S, A, T)$ be an LTS, $I, G \subseteq S$ be, respectively, the *initial* and *goal* regions of $\mathcal{S}$.

Definition 1 A controller for $\mathcal{S}$ is a function $K : S \times A \rightarrow \mathbb{B}$ such that $\forall s \in S, \forall a \in A$, if $K(s, a)$ then $\exists s' T(s, a, s')$. If $K(s, a)$ holds, we say that the action a is enabled by K in s .

We denote with $\text{dom}(K)$ the set of states for which at least an action is enabled. Formally, $\text{dom}(K) = \{s \in S \mid \exists a K(s, a)\}$.

We call a controller K a control law if K enables at most one action in each state. Formally, K is a control law if, for all $s \in \text{dom}(K)$, $K(s, a)$ and $K(s, b)$ implies $a = b$.

$\mathcal{S}^{(K)}$ denotes the closed loop system, that is the LTS $(S, A, T^{(K)})$, where $T^{(K)}(s, a, s') = T(s, a, s') \wedge K(s, a)$.

We call a path π *fullpath* [5] if either it is infinite or its last state $\pi^{(S)}(|\pi|)$ has no successors (i.e. $\text{Adm}(\mathcal{S}, \pi^{(S)}(|\pi|)) = \emptyset$). We denote with $\text{Path}(s, a)$ the set of fullpaths starting in state s with action a , i.e. the set of fullpaths π such that $\pi^{(S)}(0) = s$ and $\pi^{(A)}(0) = a$.

Given a path π in $\mathcal{S}$, we define $j(\mathcal{S}, \pi, G)$ as follows. If there exists $n > 0$ s.t. $\pi^{(S)}(n) \in G$, then $j(\mathcal{S}, \pi, G) = \min\{n \mid n > 0 \wedge \pi^{(S)}(n) \in G\}$. Otherwise, $j(\mathcal{S}, \pi, G) = +\infty$. We require $n > 0$ since our systems are nonterminating and each controllable state (including a goal state) must have a path of positive length to a goal state. Taking $\sup \emptyset = +\infty$, the *worst case distance* of a state s from the goal region G is $J(\mathcal{S}, G, s) = \sup\{j(\mathcal{S}, G, \pi) \mid \pi \in \text{Path}(s, a), a \in \text{Adm}(\mathcal{S}, s)\}$.

Definition 2 An LTS control problem is a triple $\mathcal{P} = (\mathcal{S}, I, G)$. A strong solution (or simply a solution) to $\mathcal{P}$ is a controller K for $\mathcal{S}$, such that $I \subseteq \text{dom}(K)$ and for all $s \in \text{dom}(K)$, $J(\mathcal{S}^{(K)}, G, s)$ is finite.

An optimal solution to $\mathcal{P}$ is a solution K^* to $\mathcal{P}$ such that for all solutions K to $\mathcal{P}$, for all $s \in S$, we have $J(\mathcal{S}^{(K^*)}, G, s) \leq J(\mathcal{S}^{(K)}, G, s)$.

The most general optimal (mgo) solution to $\mathcal{P}$ is an optimal solution $\bar{K}$ to $\mathcal{P}$ such that for all optimal solutions K to $\mathcal{P}$, for all $s \in S$, for all $a \in A$ we have: $K(s, a) \rightarrow \bar{K}(s, a)$. It is easy to see that this definition is well posed (i.e., the mgo solution is unique) and that $\bar{K}$ does not depend on I .

Example 1 Let $\mathcal{S} = (S, A, T)$ be the LTS in Fig. 2, where $S = \{0, 1, 2, 3, 4\}$, $A = \{0, 1\}$ and the transition relation T is defined by all arrows in the picture. Let $I = S$ and let $G = \{0\}$. The controller K that enables all dotted arrows in the picture, is an mgo for the control problem $(\mathcal{S}, I, G)$. The controller $K' = K \setminus \{(0, 1)\}$ that enables only the action 0 in the state 0, would be still an optimal solution, but no more the most general solution. The controller $K'' = K \cup \{(3, 0)\}$ that enables also the action 0 in state 3 would be still a solution (more general than K), but no more optimal. As a matter of fact, in this case $J(\mathcal{S}^{(K'')}, G, 3) = 3$, whereas $J(\mathcal{S}^{(K)}, G, 3) = 2$.

2.3 Discrete Time Linear Hybrid Systems

In this section we introduce the class of discrete time Hybrid Systems that we use as plant models, namely *Discrete Time Linear Hybrid Systems* (DTLHSs for short).

Definition 3 A Discrete Time Linear Hybrid System is a tuple $\mathcal{H} = (X, U, Y, N)$ where:

- $X = X^r \cup X^d$ is a finite sequence of real (X^r) and discrete (X^d) present state variables. We denote with X' the sequence of next state variables obtained by decorating with ' all variables in X .
- $U = U^r \cup U^d$ is a finite sequence of input variables.
- $Y = Y^r \cup Y^d$ is a finite sequence of auxiliary variables. Auxiliary variables are typically used to model modes (e.g., from switching elements such as diodes) or “local” variables.
- $N(X, U, Y, X')$ is a conjunctive predicate over $X \cup U \cup Y \cup X'$ defining the transition relation (next state) of the system. N is deterministic if $N(x, u, y_1, x') \wedge (x, u, y_2, x'')$ implies $x' = x''$, and nondeterministic otherwise.

A DTLHS is bounded if predicate N is bounded. A DTLHS is deterministic if N is deterministic.

Since any bounded guarded predicate can be transformed into an equisatisfiable conjunctive predicate (see Sect. 2.1), for the sake of readability we will use bounded guarded predicates to describe the transition relation of bounded DTLHSs. To this aim, we will also clarify which variables are boolean, and thus may be used as guards in guarded constraints. The semantics of DTLHSs is given in terms of LTSs.

Definition 4 Let $\mathcal{H} = (X, U, Y, N)$ be a DTLHS. The dynamics of $\mathcal{H}$ is defined by the Labeled Transition System $\text{LTS}(\mathcal{H}) = (\mathcal{D}_X, \mathcal{D}_U, \tilde{N})$ where: $\tilde{N} : \mathcal{D}_X \times \mathcal{D}_U \times \mathcal{D}_X \rightarrow \mathbb{B}$ is a function s.t. $\tilde{N}(x, u, x') \equiv \exists y \in \mathcal{D}_Y N(x, u, y, x')$. A state x for $\mathcal{H}$ is a state x for $\text{LTS}(\mathcal{H})$ and a run (or path) for $\mathcal{H}$ is a run for $\text{LTS}(\mathcal{H})$ (Sect. 2.2).

Example 2 Let T be a positive constant (sampling time). We define the DTLHS $\mathcal{H} = (\{x\}, \{u\}, \emptyset, N)$ where x is a continuous variable, u is a boolean variable, and $N(x, u, x') \equiv [\bar{u} \rightarrow x' = x + (\frac{5}{4} - x)T] \wedge [u \rightarrow x' = x + (x - \frac{3}{2})T]$. Since $N(\frac{5}{4}, 0, \frac{5}{4})$ holds, the infinite path $\pi_0 = \frac{5}{4}, 0, \frac{5}{4}, 0 \dots$ is a run in $\text{LTS}(\mathcal{H}) = (\mathbb{R}, \{0, 1\}, N)$.

2.3.1 DTLHS Control Problem

A DTLHS control problem $(\mathcal{H}, I, G)$ is defined as the LTS control problem $(\text{LTS}(\mathcal{H}), I, G)$. To accommodate quantization errors, always present in software based controllers, it is useful to relax the notion of control solution by tolerating an (arbitrarily small) error ε on the continuous variables. This leads to the definition of ε -solution. Let ε be a nonnegative real number, $W \subseteq \mathbb{R}^n \times \mathbb{Z}^m$. The ε -relaxation of W is the set (ball of radius ε) $\mathcal{B}_\varepsilon(W) = \{(z_1, \dots, z_n, q_1, \dots, q_m) \mid \exists (x_1, \dots, x_n, q_1, \dots, q_m) \in W \text{ and } \forall i \in [n] |z_i - x_i| \leq \varepsilon\}$.

Definition 5 Let $(\mathcal{H}, I, G)$ be a DTLHS control problem and ε be a nonnegative real number. An ε solution to $(\mathcal{H}, I, G)$ is a solution to the LTS control problem $(\text{LTS}(\mathcal{H}), I, \mathcal{B}_\varepsilon(G))$.

Example 3 Let $\mathcal{H}$ be the DTLHS in Example 2. Let $\mathcal{P} = (\mathcal{H}, I, G)$ be a control problem, where $I \equiv -2 \leq x \leq 2.5$, and $G \equiv x = 0$. A controller may drive the system near enough to the goal $x = 0$, by enabling a suitable action in such a way that $x' < x$ when $x > 0$ and $x' > x$ when $x < 0$. If the sampling

time T is small enough with respect to ε (for example $T < \frac{\varepsilon}{10}$), the controller: $K(x, u) = (-2 \leq x \leq 0 \wedge \bar{u}) \vee (0 \leq x \leq \frac{11}{8} \wedge u) \vee (\frac{11}{8} \leq x \leq 2.5 \wedge \bar{u})$ is an ε solution to $(\mathcal{H}, I, G)$. Observe that any controller K' such that $K'(\frac{5}{4}, 0)$ holds is not a solution, because in such a case $\mathcal{H}^{(K')}$ may loop forever along the path π_0 of Example 2.

2.4 Quantized Control Problem

In order to manage real valued variables, in classical control theory the concept of *quantization* is introduced (e.g., see [13]). Quantization is the process of approximating a continuous interval by a set of integer values. In the following we formally define a quantized feedback control problem for DTLHSs.

A *quantization function* γ for a real interval $I = [a, b]$ is a non-decreasing function $\gamma : I \mapsto \mathbb{Z}$ s.t. $\gamma(I)$ is a bounded integer interval. We will denote $\gamma(I)$ as $\hat{I} = [\gamma(a), \gamma(b)]$. The *quantization step* of γ , notation $\|\gamma\|$, is defined as $\sup\{|w - z| \mid w, z \in I \wedge \gamma(w) = \gamma(z)\}$. For ease of notation, we extend quantizations to integer intervals, by stipulating that in such a case the quantization function is the identity function.

Definition 6 Let $\mathcal{H} = (X, U, Y, N)$ be a DTLHS, and let $W = X \cup U \cup Y$. A quantization $\mathcal{Q}$ for $\mathcal{H}$ is a pair (A, Γ) , where:

- A is a predicate over W that explicitly bounds each variable in W . For each $w \in W$, we denote with A_w its admissible region and with $A_W = \prod_{w \in W} A_w$.
- Γ is a set of maps $\Gamma = \{\gamma_w \mid w \in W \text{ and } \gamma_w \text{ is a quantization function for } A_w\}$.

Let $W = [w_1, \dots, w_k]$ and $v = [v_1, \dots, v_k] \in A_W$. We write $\Gamma(v)$ for the tuple $[\gamma_{w_1}(v_1), \dots, \gamma_{w_k}(v_k)]$. Finally, the quantization step $\|\Gamma\|$ is defined as $\sup\{\|\gamma\| \mid \gamma \in \Gamma\}$.

A control problem admits a *quantized* solution if control decisions can be made by just looking at quantized values. This enables a software implementation for a controller.

Definition 7 Let $\mathcal{H} = (X, U, Y, N)$ be a DTLHS, $\mathcal{Q} = (A, \Gamma)$ be a quantization for $\mathcal{H}$ and $\mathcal{P} = (\mathcal{H}, I, G)$ be a DTLHS control problem. A $\mathcal{Q}$ Quantized Feedback Control (QFC) solution to $\mathcal{P}$ is a $\|\Gamma\|$ solution $K(x, u)$ to $\mathcal{P}$ such that $K(x, u) = \hat{K}(\Gamma(x), \Gamma(u))$ where $\hat{K} : \Gamma(A_X) \times \Gamma(A_U) \rightarrow \mathbb{B}$.

Example 4 Let $\mathcal{P}$ be as in Example 3. Let us consider the quantization (A, Γ) where $A = I$ and $\Gamma = \{\gamma_x\}$ where $\gamma_x(x) = \lfloor x \rfloor$. The set $\Gamma(A_x)$ of quantized states is the integer interval $[-2, 2]$. No $\mathcal{Q}$ QFC solution can exist, because in state 1 either enabling action 1 or action 0 allows infinite loops to be potentially executed in the closed loop system. The controller K in Example 3 can be obtained as a quantized controller decreasing the quantization step, for example by taking $\tilde{\Gamma} = \{\tilde{\gamma}_x\}$ where $\tilde{\gamma}_x(x) = \lfloor 8x \rfloor$.

3 Small Controllers Synthesis

It may be shown that, as expected within the framework defined in the previous section, when finer (i.e. with more bits) quantization schemas are considered better controllers are found, in terms of set-up time and ripple (see Sect. 4). On the other hand, the size of the controller code grows exponentially with the number of bit of the quantization schema. In this section we will show how we may obtain a smaller size of controller code, while retaining results on non-functional system level requirements such as set-up time and ripple.

QKS control synthesis procedure implements function *mgoCtr* in Alg. 2, which adapts the algorithm presented in [9]. Starting from goal states, the more general optimal controller is found incrementally looping backward, adding at each step to the set of states $D(s)$ controlled so far, the *strong preimage* of $D(s)$, i.e. the set of states for which there exists at least an action a that drives the system to $D(s)$, regardless of possible nondeterminism.

Algorithm 1 Building a strong mgo for an LTS control problem

Input: An LTS control problem $(\mathcal{S}, I, G)$, $\mathcal{S} = (S, A, T)$.

function *mgoCtr*($\mathcal{S}, I, G$)

1. $K(s, a) \leftarrow 0$, $D(s) \leftarrow G(s)$, $\tilde{D}(s) \leftarrow 0$
 2. **while** $D(s) \neq \tilde{D}(s)$ **do**
 3. $F(s, a) \leftarrow \exists s' T(s, a, s') \wedge \forall s' [T(s, a, s') \Rightarrow D(s')]$
 4. $K(s, a) \leftarrow K(s, a) \vee (F(s, a) \wedge \nexists a K(s, a))$
 5. $\tilde{D}(s) \leftarrow D(s)$, $D(s) \leftarrow D(s) \vee \exists a K(s, a)$
 6. **return** $\langle \forall s [I(s) \Rightarrow \exists a K(s, a)], \exists a K(s, a), K(s, a) \rangle$
-

Driven by the intuition that smaller controllers enable the same action in larger regions of the set of abstract state space, we modify *mgoCtr* search algorithm as follows.

We compute the strong preimage by *finding maximal regions* of states from which the system reaches D in *one or more steps* by repeatedly performing the *same action*. To this end, each preimage computation involves finding a family of fixpoints $E(s, a)$: for each action a , $E(s, a)$ corresponds to the maximal set of states from which D is reachable by repeatedly performing the action a only.

Algorithm 2 Symbolic Algorithm for Controller Synthesis for an LTS control problem

Input: LTS control problem $(\mathcal{S}, I, G)$, with LTS $\mathcal{S} = (S, A, T)$

function $smallCtr(\mathcal{S}, I, G)$

1. $K(s, a) \leftarrow 0, D(s) \leftarrow 0$
 2. **repeat**
 3. $O(s) \leftarrow D(s) \vee G(s)$
 4. $E(s, a) \leftarrow 0$
 5. **repeat**
 6. $F(s, a) \leftarrow \exists s' T(s, a, s') \wedge$
 7. $\forall s' [T(s, a, s') \Rightarrow E(s', a) \vee O(s')]$
 8. $\tilde{E}(s, a) \leftarrow E(s, a), E(s, a) \leftarrow E(s, a) \vee F(s, a)$
 9. **until** $E(s, a) = \tilde{E}(s, a)$
 10. **for all** $\tilde{a} \in A$ **do**
 11. $K(s, a) \leftarrow K(s, a) \vee (E(s, a) \wedge a = \tilde{a} \wedge \neg \exists b K(s, b))$
 12. $\tilde{D}(s) \leftarrow D(s), D(s) \leftarrow D(s) \vee \exists a K(s, a)$
 13. **until** $D(s) = \tilde{D}(s)$
 14. **return** $\langle \forall s [I(s) \Rightarrow \exists a K(s, a)], \exists a K(s, a), K(s, a) \rangle$
-

3.1 Control Synthesis Algorithm

Our controller synthesis algorithm is shown in Alg. 2. Function $smallCtr(\mathcal{S}, I, G)$ computes a *maximal solution* (Theorem 2) to the control problem $(\mathcal{S}, I, G)$ implementing the heuristic described above in order to obtain a succinct controller, i.e. representable with an OBDD (and hence C code) much smaller than the one needed for the mgo.

In Alg. 2 $K(s, a)$ denotes the OBDD that represents the controller computed so far and $D(s)$ is the OBDD that represents its domain. $\tilde{D}(s)$ represents the domain of the controller computed at the previous iteration. The computation starts by initializing $K(s, a)$ and its domain $D(s)$ to the empty OBDD, that corresponds to the always undefined function and the empty set (line 1).

At each iteration of the outer loop (lines 2–13), a target set of states $O(s)$ is considered (line 3): $O(s)$ consists of goal states $G(s)$ and the set $D(s)$ of already controlled states.

The inner loop (lines 5–9) computes, for each action a , the maximal set of states $E(s, a)$ that can reach the target set $O(s)$ by repeatedly performing the action a only. In other words, given an action $\tilde{a}$, $E(s, \tilde{a})$ is the mgo of the control problem (S', I, O) , where the LTS $S' = (S, \{\tilde{a}\}, T')$ is obtained by restricting the dynamics of S to the action $\tilde{a}$, i.e. $T'(s, a, s') = T(s, a, s') \wedge a = \tilde{a}$.

After that, K is updated by adding to it state-action pairs in $E(s, a)$. Instead of simply computing $K(s, a) = K(s, a) \vee E(s, a)$, to keep the controller smaller, function *smallCtr* avoids to add to K possible intersections between any pair of sets $E(s, a)$ and $E(s, b)$ for $a \neq b$ (line 11). As a consequence, the resulting controller K is a control law, i.e. it enables just one action in a given state s .

The order in which the loop in lines 10–11 enumerates the set of actions gives priority to actions that are considered before. Let $a_0, a_1, \dots, a_n$ be the sequence of actions as enumerated by the **for** loop. If there exists at least an action a such that $E(s, a)$ holds, then we will have that $K(s, a_k)$ holds only for a certain a_k such that $k = \min\{i \mid E(s, a_i)\}$. In many control problems, it is useful to give priority to some actions, e.g. in order to prefer “low power” actions. It is easy to extend our approach to deal with such an issue, by simply considering a given order for the **for** loop.

The computation ends when no new state is added to the controllable region, i.e. when $D(s)$, the domain of the controller computed so far, is the same as $\tilde{D}(s)$, the domain of the controller computed at the previous iteration.

Example 5 Let $\mathcal{P}$ be the control problem described in Example 1. The first iteration of Alg. 2 computes the predicate $E(s, a)$ that holds on the set $\{(0, 0), (0, 1), (1, 0), (2, 0), (3, 0), (4, 1)\}$, i.e. $E(s, a) = E(s, 0) \vee E(s, 1)$, where the set of pairs that satisfies $E(s, 0)$ is $\{(0, 0), (1, 0), (2, 0), (3, 0)\}$ and the set of pairs that satisfies $E(s, 1)$ is $\{(0, 1), (4, 1)\}$. Depending on the order in which the **for** loop in lines 10–11 enumerates the set of actions, in the state 0 the resulting controller K^* enables the action 0 ($K^*(s, a) = E(s, 0) \cup (E(s, 1) \setminus \{(0, 1)\})$) or the action 1 ($K^*(s, a) = E(s, 1) \cup (E(s, 0) \setminus \{(0, 0)\})$). Observe that, in any case, K^* is not optimal. An optimal controller would enable the transition $T(3, 1, 1)$ rather than $T(3, 0, 2)$ (see Example 1).

Remark 1 Let $\pi = s_0, a_0, s_1, a_1, \dots, a_{n-1}, s_n$ be a path. An action switch in π occurs whenever $a_i \neq a_{i+1}$. Controllers generated by Alg. 2 implement control strategies with a very low number of switches. In many systems this is a

desirable property. A “switching optimal” control strategy cannot be, however, implemented by a memoryless state-feedback control law. As an example, take again the control problem $\mathcal{P}$ described in Example 1. The controller defined by $E(s, a)$ in Example 5 contains all switch optimal paths. However, to minimize the number switches along the paths going through state 0, a controller should enable action 0 when coming from state 1, action 1 when coming from 4, and repeat the last action (0 or 1) when the system is executing the self-loops in state 0. In other words, only a feedback controller with memory can implement this control strategy.

3.2 Synthesis Algorithm Correctness and Completeness

The following two theorems establish the correctness of Alg. 2, by showing that the controller computed by function *smallCtr* is indeed a solution to the control problem given as input (Theorem 1), and its completeness, in the sense that the domain of the computed controller is *maximal* with respect to the domain of any other solution (Theorem 2).

Theorem 1 *Let $\mathcal{S} = (S, A, T)$ be an LTS, and $I, G \subseteq S$ be two sets of states. If *smallCtr*($\mathcal{S}, I, G$) returns the tuple $\langle \text{TRUE}, D, K \rangle$, then K is a solution to the control problem $(\mathcal{S}, I, G)$.*

Proof 1 *If *smallCtr*($\mathcal{S}, I, G$) returns the tuple $\langle \text{TRUE}, D, K \rangle$, clearly $I \subseteq \text{dom}(K)$ (see Alg. 2, line14). We have to show that, for all $s \in \text{dom}(K)$, $J(\mathcal{S}^{(K)}, G, s)$ is finite.*

*First of all, we show that, for any predicate $E(s, a)$ computed at the end of the inner **repeat** loop of *smallCtr* (lines 5–9), if $E(s, a)$ holds, then we have that $J(\mathcal{S}^{(E)}, O, s)$ is finite. We proceed by induction on the number of iteration of the inner **repeat** loop. To ease notation, the predicate $F(s, a)$ computed in line 6 during the i -th iteration will be denoted by $F_i(s, a)$. We will show that if $F_n(s, a)$ holds, then $J(\mathcal{S}^{(E)}, O, s) = n$. Clearly if $F_1(s, a)$ holds, then for all s' such that $T(s, a, s')$, s' belongs to O , and hence $J(\mathcal{S}^{(E)}, O, s) = 1$. Along the same lines, if $F_{n+1}(s, a)$ holds, then $J(\mathcal{S}^{(E)}, F_n, s) = 1$, and by applying induction hypothesis, $J(\mathcal{S}^{(E)}, O, s) = n + 1$. As for termination, we have that if $\tilde{E}(s, a) \neq E(s, a)$ then at least one new state has been included in $E(s, a)$. Thus the function $|S| - |\text{dom}(E)|$ is strictly positive and strictly decreasing at each iteration.*

The outer **repeat** loop behaves in a similar way. Again, we denote with $E_i(s, a)$ the predicate $E(s, a)$ computed in line 4 during the i -th iteration. If $s \in \text{dom}(K)$, then $E_i(s, a)$ holds for some i and some a . We now prove the statement of the theorem by induction on i . If $i = 1$, we have that $O(s) = G(s)$ and that $J(\mathcal{S}^{(E_1)}, O, s)$ is finite, and hence trivially $J(\mathcal{S}^{(K)}, G, s)$ is finite. If $i > 1$, then we have that $J(\mathcal{S}^{(E_i)}, \text{dom}(E_{i-1}), s)$ is finite. Since, by inductive hypothesis, also $J(\mathcal{S}^{(E_{i-1})}, O, s)$ is finite, we have that $J(\mathcal{S}^{(K)}, G, s) \leq J(\mathcal{S}^{(E_i)}, \text{dom}(E_{i-1}), s) + J(\mathcal{S}^{(E_{i-1})}, O, s)$ is finite.

Theorem 2 Let $\mathcal{S} = (S, A, T)$ be an LTS, and $I, G \subseteq S$ be two sets of states. If $\text{smallCtr}(\mathcal{S}, I, G)$ returns the tuple $\langle \text{TRUE}, D, K \rangle$, then $D = \text{dom}(K)$ is the maximal controllable region, i.e. for any other solution K^* to the control problem $(\mathcal{S}, I, G)$ we have $\text{dom}(K^*) \subseteq \text{dom}(K)$.

Proof 2 Let $\text{dom}_n(K) = \{s \mid J(\mathcal{S}^{(K)}, s, G) = n\}$. We will show by induction that, for all n , $\text{dom}_n(K^*) \subseteq \text{dom}_n(K)$.

($n = 1$) Let $s \in \text{dom}_1(K^*)$. Then $\text{Adm}(\mathcal{S}, s) \neq \emptyset$ and there exists at least an action $a \in \text{Adm}(\mathcal{S}, s)$ such that $K^*(s, a)$ holds. Thus, for all s' such that $T(s, a, s')$ we have that $s' \in G$. But this means that $F(s, a)$ holds (Alg. 2, line 6) and therefore $K(s, a)$ holds. Hence $s \in \text{dom}(K)$.

($n > 1$) Let $s \in \text{dom}_n(K^*)$. Then $\text{Adm}(\mathcal{S}, s) \neq \emptyset$ and there exists at least an action $a \in \text{Adm}(\mathcal{S}, s)$ such that $K^*(s, a)$ holds. Thus, for all s' such that $T(s, a, s')$ we have that $s' \in \text{dom}_{n-1}(K^*)$. By inductive hypothesis, $\text{dom}_{n-1}(K^*) \subseteq \text{dom}(K)$. Therefore, for all s' such that $T(s, a, s')$ we have that $s' \in \text{dom}(K)$. Let us suppose that $s \notin \text{dom}(K)$. But this implies that $\text{Img}(\mathcal{S}, s, a) \not\subseteq \text{dom}(K)$, otherwise Alg. 2 would not terminated before adding s to $E(s, a)$ at some iteration. This leads to a contradiction, because $\text{Img}(\mathcal{S}, s, a) \subseteq \text{dom}_{n-1}(K^*) \subseteq \text{dom}(K)$.

4 Experimental Results

In this section we present our experiments that aim at evaluating effectiveness of our control software synthesis technique. We mainly evaluate the control software size reduction and the impact on other non-functional control software requirements such as set-up time (optimality) and ripple.

We implemented function *smallCtr* in C programming language using the CUDD [10] package for OBDD based computations. The resulting tool, QKS^{sc} , extends the tool *QKS* by adding the possibility of synthesising control software (step 2 in Fig. 1) by using *smallCtr* instead of the mgo controller synthesis.

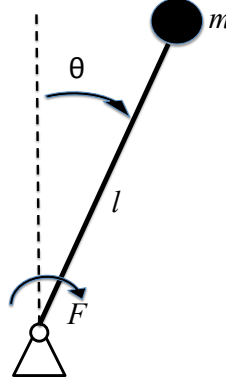


Figure 3: Inverted Pendulum with Stationary Pivot Point.

In Section 4.1 and 4.2 we will present the DTLHS models of the inverted pendulum and the multi-input buck DC-DC converter, on which our experiments focus. In Section 4.3 we give the details of the experimental setting, and finally, in Section 4.4, we discuss experimental results.

4.1 The Inverted Pendulum as a DTLHS

The inverted pendulum [19] (see Fig. 3) is modeled by taking the angle θ and the angular velocity $\dot{\theta}$ as state variables. The input of the system is the torquing force $u \cdot F$, that can influence the velocity in both directions. Here, the variable u models the direction and the constant F models the intensity of the force. Differently from [19], we consider the problem of finding a discrete controller, whose decisions may be only “apply the force clockwise” ($u = 1$), “apply the force counterclockwise” ($u = -1$), or “do nothing” ($u = 0$). The behaviour of the system depends on the pendulum mass m , the length of the pendulum l , and the gravitational acceleration g . Given such parameters, the motion of the system is described by the differential equation $\ddot{\theta} = \frac{g}{l} \sin \theta + \frac{1}{ml^2} uF$. In order to obtain a state space representation, we consider the following normalized system, where x_1 is the angle θ and x_2 is the angular speed $\dot{\theta}$:

$$\begin{cases} \dot{x}_1 = x_2 \\ \dot{x}_2 = \frac{g}{l} \sin x_1 + \frac{1}{ml^2} uF \end{cases} \quad (1)$$

The discrete time model obtained from the equations in (1) by introducing a constant T that models the sampling time is:

$$(x'_1 = x_1 + Tx_2) \wedge (x'_2 = x_2 + T\frac{g}{l}\sin x_1 + T\frac{1}{ml^2}uF)$$

that is not linear, as it contains the function $\sin x_1$. A linear model can be found by under- and over-approximating the non linear function $\sin x$. In our experiments (Sect. 4), we will consider the linear model obtained as follows.

First of all, in order to exploit sinus periodicity, we consider the equation $x_1 = 2\pi y_k + y_\alpha$, where y_k represents the period in which x_1 lies and $y_\alpha \in [-\pi, \pi]$ ¹ represents the actual x_1 inside a given period. Then, we partition the interval $[-\pi, \pi]$ in four intervals: $I_1 = [-\pi, -\frac{\pi}{2}]$, $I_2 = [-\frac{\pi}{2}, 0]$, $I_3 = [0, \frac{\pi}{2}]$, $I_4 = [\frac{\pi}{2}, \pi]$. In each interval I_i ($i \in [4]$), we consider two linear functions $f_i^+(x)$ and $f_i^-(x)$, such that for all $x \in I_i$, we have that $f_i^-(x) \leq \sin x \leq f_i^+(x)$. As an example, $f_1^+(y_\alpha) = -0.637y_\alpha - 2$ and $f_1^-(y_\alpha) = -0.707y_\alpha - 2.373$.

Let us consider the set of fresh continuous variables $Y^r = \{y_\alpha, y_{\sin}\}$ and the set of fresh discrete variables $Y^d = \{y_k, y_q, y_1, y_2, y_3, y_4\}$, being $y_1, \dots, y_4$ boolean variables. The DTLHS model $\mathcal{I}_F$ for the inverted pendulum is the tuple (X, U, Y, N) , where $X = \{x_1, x_2\}$ is the set of continuous state variables, $U = \{u\}$ is the set of input variables, $Y = Y^r \cup Y^d$ is the set of auxiliary variables, and the transition relation $N(X, U, Y, X')$ is the following predicate:

$$\begin{aligned} & (x'_1 = x_1 + 2\pi y_q + Tx_2) \wedge (x'_2 = x_2 + T\frac{g}{l}y_{\sin} + T\frac{1}{ml^2}uF) \\ & \wedge \bigwedge_{i \in [4]} y_i \rightarrow f_i^-(y_\alpha) \leq y_{\sin} \leq f_i^+(y_\alpha) \\ & \wedge \bigwedge_{i \in [4]} y_i \rightarrow y_\alpha \in I_i \wedge \sum_{i \in [4]} y_i \geq 1 \\ & \wedge x_1 = 2\pi y_k + y_\alpha \wedge -\pi \leq x'_1 \leq \pi \end{aligned}$$

Overapproximations of the system behaviour increase system nondeterminism. Since $\mathcal{I}_F$ dynamics overapproximates the dynamics of the non-linear model, the controllers that we synthesize are inherently *robust*, that is they meet the given closed loop requirements *notwithstanding* nondeterministic small *disturbances* such as variations in the plant parameters. Tighter overapproximations of non-linear functions makes finding a controller easier, whereas coarser overapproximations makes controllers more robust.

The typical goal for the inverted pendulum is to turn the pendulum steady to the upright position, starting from any possible initial position, within a given speed interval.

¹In this section we write π for a rational approximation of it.

buck DC-DC converter with the DTLHS $\mathcal{B}_n = (X, U, Y, N)$, with $X = [i_L, v_O]$, $U = [u_1, \dots, u_n]$, $Y = [v_D, v_1^D, \dots, v_{n-1}^D, i_D, I_1^u, \dots, I_n^u, v_1^u, \dots, v_n^u]$.

The transition relation N is as follows. From a simple circuit analysis (e.g. see [20]) we have the following equations:

$$\begin{aligned}\dot{i}_L &= a_{1,1}i_L + a_{1,2}v_O + a_{1,3}v_D \\ \dot{v}_O &= a_{2,1}i_L + a_{2,2}v_O + a_{2,3}v_D\end{aligned}$$

where the coefficients $a_{i,j}$ depend on the circuit parameters R, r_L, r_C, L and C in the following way: $a_{1,1} = -\frac{r_L}{L}$, $a_{1,2} = -\frac{1}{L}$, $a_{1,3} = -\frac{1}{L}$, $a_{2,1} = \frac{R}{r_C+R}[-\frac{r_C r_L}{L} + \frac{1}{C}]$, $a_{2,2} = \frac{-1}{r_C+R}[\frac{r_C R}{L} + \frac{1}{C}]$, $a_{2,3} = -\frac{1}{L} \frac{r_C R}{r_C+R}$. Using a discrete time model with sampling time T (writing x' for $x(t+1)$) we have:

$$\begin{aligned}i_L' &= (1 + Ta_{1,1})i_L + Ta_{1,2}v_O + Ta_{1,3}v_D \\ v_O' &= Ta_{2,1}i_L + (1 + Ta_{2,2})v_O + Ta_{2,3}v_D.\end{aligned}$$

The algebraic constraints stemming from the constitutive equations of the switching elements are the following:

$$\begin{aligned}q_0 \rightarrow (v_D = R_{\text{on}}i_D) \quad \bar{q}_0 \rightarrow (v_D = R_{\text{off}}i_D) \quad v_D &= v_n^u - V_n \\ q_0 \rightarrow (i_D \geq 0) \quad \bar{q}_0 \rightarrow (v_D \leq 0) \quad i_L &= i_D + \sum_{i=1}^n I_i^u \\ \bigwedge_{i \in [n]} q_i \rightarrow (v_i^D = R_{\text{on}}I_i^u) \quad \bigwedge_{i \in [n]} \bar{q}_i \rightarrow (v_i^D &= R_{\text{off}}I_i^u) \\ \bigwedge_{i \in [n]} q_i \rightarrow (I_i^u \geq 0) \quad \bigwedge_{i \in [n]} \bar{q}_i \rightarrow (v_i^D &\leq 0) \\ \bigwedge_{j \in [n-1]} u_j \rightarrow (v_j^u = R_{\text{on}}I_j^u) \quad \bigwedge_{j \in [n-1]} \bar{u}_j \rightarrow (v_j^u &= R_{\text{off}}I_j^u) \\ \bigwedge_{i \in [n]} v_D &= v_i^u + v_i^D - V_i\end{aligned}$$

4.3 Experimental Settings

All experiments have been carried out on an Intel(R) Xeon(R) CPU @ 2.27GHz, with 23GiB of RAM, Kernel: Linux 2.6.32-5-686-bigmem, distribution Debian GNU/Linux 6.0.3 (squeeze).

As in [19], we set pendulum parameters l and m in such a way that $\frac{g}{l} = 1$ (i.e. $l = g$) and $\frac{1}{ml^2} = 1$ (i.e. $m = \frac{1}{l^2}$). As for the quantization, we set $A_{x_1} = [-1.1\pi, 1.1\pi]$ and $A_{x_2} = [-4, 4]$, and we define $A_{\mathcal{I}_F} = A_{x_1} \times A_{x_2} \times A_u$. The goal region is defined by the predicate $G_{\mathcal{I}_F}(X) \equiv (-\rho \leq x_1 \leq \rho) \wedge (-\rho \leq x_2 \leq \rho)$, where $\rho \in \{0.05, 0.1\}$, and the initial region is defined by the predicate $I_{\mathcal{I}_F}(X) \equiv (-\pi \leq x_1 \leq \pi) \wedge (-4 \leq x_2 \leq 4)$.




Figure 5: K^{mgo} enabled actions ($\mathcal{I}_{0.5}, b=9$)




Figure 6: K^{sc} enabled actions ($\mathcal{I}_{0.5}, b=9$)




Figure 7: Simulation of $\mathcal{I}_{0.5}^{K^{\text{sc}}}, \mathcal{I}_{0.5}^{K^{\text{mgo}}}$ ($b = 9$)

In the multi-input buck DC-DC converter with n inputs $\mathcal{B}_n$, we set constant parameters as follows: $L = 2 \cdot 10^{-4}$ H, $r_L = 0.1 \Omega$, $r_C = 0.1 \Omega$, $R = 5 \Omega$, $C = 5 \cdot 10^{-5}$ F, $R_{\text{on}} = 0 \Omega$, $R_{\text{off}} = 10^4 \Omega$, and $V_i = 10i$ V for $i \in [n]$. As for the quantization, we set $A_{i_L} = [-4, 4]$ and $A_{v_O} = [-1, 7]$, and we define $A_{\mathcal{B}_n} = A_{i_L} \times A_{v_O} \times A_{u_1} \times \dots \times A_{u_n}$. The goal region is defined by the predicate $G_{\mathcal{B}_n}(X) \equiv (-2 \leq i_L \leq 2) \wedge (5 - \rho \leq v_O \leq 5 + \rho)$, where $\rho = 0.01$, and the initial region is defined by the predicate $I_{\mathcal{B}_n}(X) \equiv (-2 \leq i_L \leq 2) \wedge (0 \leq v_O \leq 6.5)$.

In both examples, we use uniform quantization functions dividing the domain of each state variable x into 2^b equal intervals, where b is the number of bits used by AD conversion. The resulting quantizations are $\mathcal{Q}_{\mathcal{I}_F, b} = (A_{\mathcal{I}_F}, \Gamma_b)$ and $\mathcal{Q}_{\mathcal{B}_n, b} = (A_{\mathcal{B}_n}, \Gamma_b)$. Since in both examples have two quantized variables, each one with b bits, the number of quantized (abstract) states is exactly 2^{2b} .

We run QKS and QKS^{sc} on the inverted pendulum model $\mathcal{I}_F$ for different values of F (force intensity), and on the multi-input buck DC-DC model $\mathcal{B}_n$, for different values of parameter n (number of the switches). For the inverted pendulum, we use sampling time $T = 0.1$ seconds when the quantization schema has less than 10 bits and $T = 0.01$ seconds otherwise. For the multi-input buck, we set $T = 10^{-6}$ seconds. For both systems, we run experiments with different quantization schema.

For all of such experiments, QKS and QKS^{sc} output a control software in C language. In the following, we will denote with K^{mgo} the output of QKS, and with K^{sc} the output of QKS^{sc} on the same control problem.

4.4 Experiments Discussion

We compare the controller K^{mgo} e K^{sc} by evaluating their size, as well as other non-functional requirements such as the set-up time and the ripple of the closed loop system. Tables 1 and 2 summarize experimental results.

In both tables, column $|K^{\text{mgo}}|$ (resp. $|K^{\text{sc}}|$) shows the size (in Kbytes) of the .o file obtained by compiling the output of *QKS* (resp. *QKS^{sc}*) with gcc. Column $\frac{|K^{\text{sc}}|}{|K^{\text{mgo}}|}$ shows the ratio between the size of the two controllers and it illustrates how much one gains in terms of code size by using function *smallCtr* instead of *mgoCtr*.

Column Path^{mgo} (resp. Path^{sc}) shows the average length of (worst case) paths to the goal region in the closed loop abstract systems $\hat{\mathcal{H}}^{(K^{\text{mgo}})}$ (resp. $\hat{\mathcal{H}}^{(K^{\text{sc}})}$). This number, multiplied by the sampling time, provides an estimation of the average set-up time of the closed loop system. Column $\frac{\text{Path}^{\text{sc}}}{\text{Path}^{\text{mgo}}}$ shows the ratio between the values in the two previous columns, and it provides an estimation of the price one has to pay (in terms of optimality) by using a small controller instead of the mgo controller.

The last three columns show computation time of function *smallCtr* (column CPU^{sc} , in seconds), the ratio with respect to *mgoCtr* (column $\frac{\text{CPU}^{\text{sc}}}{\text{CPU}^{\text{mgo}}}$), and *smallCtr* memory usage (column Mem, in Kbytes). Function *smallCtr* is obviously slower than *mgoCtr*, because of non-optimality: it performs more loops, and it deals with more complex computations. We observe that the controller synthesis off-line computation is not a critical parameter in the control software synthesis flow.

As we can see in Tab. 1 and Tab. 2 the size of the controller K^{sc} tends to become smaller and smaller with respect to the size of the correspondent controller K^{mgo} as the complexity of the model grows. This is a general trend, both with respect to the number of switches of the multi-input buck, and with respect to the number of bits of the quantization schema (in both examples). In particular, in the 12 bits controllers for the inverted pendulum, the size of K^{sc} is just about 5% of the size of K^{mgo} .

A less expected result is that the average worst case length of paths to the goal in the closed loop system $\hat{\mathcal{H}}^{(K^{\text{sc}})}$ tends to get slightly closer to the one in $\hat{\mathcal{H}}^{(K^{\text{mgo}})}$ as the complexity of the system grows. $\hat{\mathcal{H}}^{(K^{\text{sc}})}$ simulations show an even better behaviour. As an example, Fig. 7 shows a simulation of the closed loop systems $\mathcal{I}_{0.5}^{K^{\text{sc}}}$ and $\mathcal{I}_{0.5}^{K^{\text{mgo}}}$, by considering a quantization schema of 9 bits and starting from $x_1 = \pi, x_2 = 0$. In order to show pendulum phases, x_1 is not normalized in $[-\pi, \pi]$, thus also $x_1 = 2\pi$ is in the goal. As we can see, the small controller needs slightly more time (about a second) to reach the goal. Interestingly, $\mathcal{I}_{0.5}^{K^{\text{mgo}}}$ follows a smarter trajectory, with a swing less.

Fig. 8 (resp. Fig. 9) shows the ripple of x_1 in the inverted pendulum closed loop system $\mathcal{I}_{0.5}^{K^{\text{mgo}}}$ (resp. $\mathcal{I}_{0.5}^{K^{\text{sc}}}$), by focusing on the part of the simulation in Fig. 7 which is (almost always) inside the goal. As we can see, the small controller yields

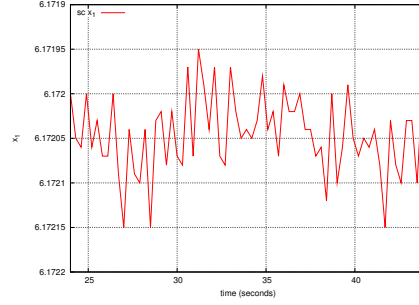
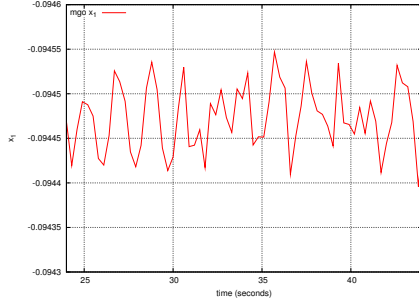


Figure 8: Ripple for K^{mgo} ($b = 9$) Figure 9: Ripple for K^{sc} ($b = 9$)

a worst ripple (0.0002 vs 0.0001), which may be however neglected in practice cases.

To visualize the very different nature of these controllers, Fig. 5 (resp. Fig. 6) shows actions that are enabled by K^{mgo} (resp. K^{sc}) in all states of the admissible region of the inverted pendulum control problem $\mathcal{I}_{0.5}$, by considering a quantization schema of 9 bits. In these pictures, different colors mean different actions. We observe that in Fig. 5 we need 7 colors, because in a given state K^{mgo} may enable any nonempty subset of the set of actions. As expected, K^{sc} control strategy is much more regular and thus simpler than the one of K^{mgo} , since it enables the same action in relatively large regions of the state space. Some symmetries of Fig. 5 are broken in Fig. 6 because when more actions could be chosen, *smallCtr* gives always priority to one of them (Alg. 2, lines 10–11).

5 Conclusions

We presented a novel automatic methodology to synthesize control software for Discrete Time Linear Hybrid Systems, aimed at generating small size control software.

We proved our methodology to be very effective, by showing that we synthesize controllers up to 20 times smaller than time optimal ones. Small controllers keep other software non-functional requirements (e.g. WCET) at the cost of being suboptimal with respect to system level non-functional requirements (i.e. set-up time and ripple). Such inefficiency may be fully justified since it allows a designer to consider much cheaper microcontroller devices.

Future work may consist of further exploiting small controller regularities in order to improve on other software as well system level non-functional requirements.

Table 1: Results for Multiinput Buck DC-DC Converter

b	n	$ K^{\text{mgo}} $	$ K^{\text{sc}} $	$\frac{ K^{\text{sc}} }{ K^{\text{mgo}} }$	Path ^{mgo}	Path ^{sc}	$\frac{\text{Path}^{\text{sc}}}{\text{Path}^{\text{mgo}}}$	CPU ^{sc}	$\frac{\text{CPU}^{\text{sc}}}{\text{CPU}^{\text{mgo}}}$	Mem
9	1	36	30	83.9%	179.40	517.67	2.89	11.01	2.64	3.95e+04
9	2	62	34	56.0%	142.19	386.70	2.72	9.15	1.59	3.71e+04
9	3	110	41	37.3%	131.55	353.77	2.69	15.01	1.58	5.66e+04
9	4	157	42	27.3%	127.53	324.24	2.54	19.98	1.37	6.57e+04
10	1	91	56	61.4%	136.85	262.83	1.92	20.43	1.62	6.41e+04
10	2	149	61	41.0%	110.78	231.37	2.09	23.14	1.36	6.71e+04
10	3	244	65	26.9%	103.40	216.11	2.09	34.06	1.21	9.17e+04
10	4	341	70	20.6%	100.43	209.47	2.09	53.70	1.18	1.23e+05

Table 2: Results for the Inverted Pendulum

b	F	T	$ K^{\text{ngo}} $	$ K^{\text{sc}} $	$\frac{ K^{\text{sc}} }{ K^{\text{ngo}} }$	Path^{ngo}	Path^{sc}	$\frac{\text{Path}^{\text{sc}}}{\text{Path}^{\text{ngo}}}$	CPU^{sc}	$\frac{\text{CPU}^{\text{sc}}}{\text{CPU}^{\text{ngo}}}$	Mem
8	0.5	0.1	163	44	27.4%	132.96	234.35	1.76	16.25	2.16	4.15e+04
9	0.5	0.1	352	92	26.3%	69.64	147.74	2.12	33.59	2.12	8.47e+04
10	0.5	0.1	752	206	27.5%	59.16	133.70	2.26	123.94	2.57	2.27e+05
11	0.5	0.01	2467	213	8.6%	1315.69	1898.50	1.44	798.03	2.38	1.40e+05
12	0.5	0.01	8329	439	5.3%	674.39	1280.32	1.90	2769.08	1.07	8.82e+05
8	2.0	0.1	96	31	32.8%	24.30	58.00	2.39	3.41	1.87	4.13e+04
9	2.0	0.1	185	81	44.1%	22.29	40.13	1.80	9.64	1.94	8.39e+04
10	2.0	0.1	383	194	50.6%	21.91	43.24	1.97	49.26	2.13	2.25e+05
11	2.0	0.01	2204	128	5.8%	230.25	437.18	1.90	198.95	2.87	1.46e+05
12	2.0	0.01	5892	300	5.1%	207.31	390.48	1.88	561.18	0.45	9.63e+05

References

- [1] R. Alur, C. Courcoubetis, N. Halbwachs, T. A. Henzinger, P. H. Ho, X. Nicollin, A. Olivero, J. Sifakis, and S. Yovine. The algorithmic analysis of hybrid systems. *Theoretical Computer Science*, 138(1):3 – 34, 1995.
- [2] R. Alur, T.A. Henzinger, G. Lafferriere, and G.J. Pappas. Discrete abstractions of hybrid systems. *Proceedings of the IEEE*, 88(7):971–984, 2000.
- [3] Rajeev Alur, Thao Dang, and Franjo Ivančić. Predicate abstraction for reachability analysis of hybrid systems. *ACM Trans. on Embedded Computing Sys.*, 5(1):152–199, 2006.
- [4] Rajeev Alur, Thomas A. Henzinger, and Pei-Hsin Ho. Automatic symbolic verification of embedded systems. *IEEE Trans. Softw. Eng.*, 22(3):181–201, 1996.
- [5] Paul C. Attie, Anish Arora, and E. Allen Emerson. Synthesis of fault-tolerant concurrent programs. *ACM Trans. on Program. Lang. Syst.*, 26(1):125–185, 2004.
- [6] A. Bemporad. Hybrid Toolbox - User's Guide, 2004. <http://www.ing.unitn.it/~bemporad/hybrid/toolbox>.
- [7] Alberto Bemporad and Nicolò Giorgetti. A sat-based hybrid solver for optimal control of hybrid systems. In *HSCC*, LNCS 2993, pages 126–141, 2004.
- [8] William L. Brogan. *Modern control theory (3rd ed.)*. Prentice-Hall, Inc., Upper Saddle River, NJ, USA, 1991.
- [9] Alessandro Cimatti, Marco Roveri, and Paolo Traverso. Strong planning in non-deterministic domains via model checking. In *AIPS*, pages 36–43, 1998.
- [10] CUDD Web Page: <http://vlsi.colorado.edu/~fabio/>, 2004.
- [11] G. Della Penna, D. Magazzeni, A. Tofani, B. Intrigila, I. Melatti, and E. Tronci. *Automated Generation of Optimal Controllers through Model Checking Techniques*, volume 15 of *LNEE*. Springer, 2008.
- [12] Goran Frehse. Phaver: algorithmic verification of hybrid systems past hytech. *Int. J. Softw. Tools Technol. Transf.*, 10(3):263–279, 2008.

- [13] Minyue Fu and Lihua Xie. The sector bound approach to quantized feedback control. *IEEE Trans. on Automatic Control*, 50(11):1698–1711, 2005.
- [14] T.A. Henzinger, P.-H. Ho, and H. Wong-Toi. Hytech: A model checker for hybrid systems. *STTT*, 1(1):110–122, 1997.
- [15] Thomas A. Henzinger, Peter W. Kopke, Anuj Puri, and Pravin Varaiya. What’s decidable about hybrid automata? *J. of Computer and System Sciences*, 57(1):94–124, 1998.
- [16] Thomas A. Henzinger and Joseph Sifakis. The embedded systems design challenge. In *FM*, LNCS 4085, pages 1–15, 2006.
- [17] Susmit Jha, Sanjit A. Seshia, and Ashish Tiwari. Synthesis of optimal switching logic for hybrid systems. In *EMSOFT*, pages 107–116. ACM, 2011.
- [18] W. Kim, M. S. Gupta, G.-Y. Wei, and D. M. Brooks. Enabling on-chip switching regulators for multi-core processors using current staggering. In *ASGI*, 2007.
- [19] G. Kreisselmeier and T. Birkhölzer. Numerical nonlinear regulator design. *IEEE Trans. on Automatic Control*, 39(1):33–46, 1994.
- [20] Ping-Zong Lin, Chun-Fei Hsu, and Tsu-Tian Lee. Type-2 fuzzy logic controller design for buck dc-dc converters. In *FUZZ*, pages 365–370, 2005.
- [21] Federico Mari, Igor Melatti, Ivano Salvo, and Enrico Tronci. Synthesis of quantized feedback control software for discrete time linear hybrid systems. In *CAV*, LNCS 6174, pages 180–195, 2010.
- [22] Federico Mari, Igor Melatti, Ivano Salvo, and Enrico Tronci. From boolean relations to control software. In *ICSEA*, 2011.
- [23] Manuel Mazo, Anna Davitian, and Paulo Tabuada. Pessoa: A tool for embedded controller synthesis. In *CAV*, LNCS 6174, pages 566–569, 2010.
- [24] Giordano Pola, Antoine Girard, and Paulo Tabuada. Approximately bisimilar symbolic models for nonlinear control systems. *Automatica*, 44(10):2508–2516, 2008.

- [25] M. Rodriguez, P. Fernandez-Miaja, A. Rodriguez, and J. Sebastian. A multiple-input digitally controlled buck converter for envelope tracking applications in radiofrequency power amplifiers. *IEEE Trans on Pow El*, 25(2):369–381, 2010.
- [26] Wing-Chi So, C.K. Tse, and Yim-Shu Lee. Development of a fuzzy logic controller for dc/dc converters: design, computer simulation, and experimental evaluation. *IEEE Trans. on Power Electronics*, 11(1):24–32, 1996.
- [27] Claire Tomlin, John Lygeros, and Shankar Sastry. Computing controllers for nonlinear hybrid systems. In *HSCC*, LNCS 1569, pages 238–255, 1999.
- [28] Enrico Tronci. Automatic synthesis of controllers from formal specifications. In *ICFEM*, pages 134–143. IEEE, 1998.
- [29] H. Wong-Toi. The synthesis of controllers for linear hybrid automata. In *CDC*, pages 4607–4612 vol. 5. IEEE, 1997.
- [30] B. Yordanov, J. Tumova, I. Cerna, J. Barnat, and C. Belta. Temporal logic control of discrete-time piecewise affine systems. *To Appear in IEEE Transactions On Automatic Control*, 2012.